



MD-2UDS19-SxS



OPEN/DEPLOYED POSITION


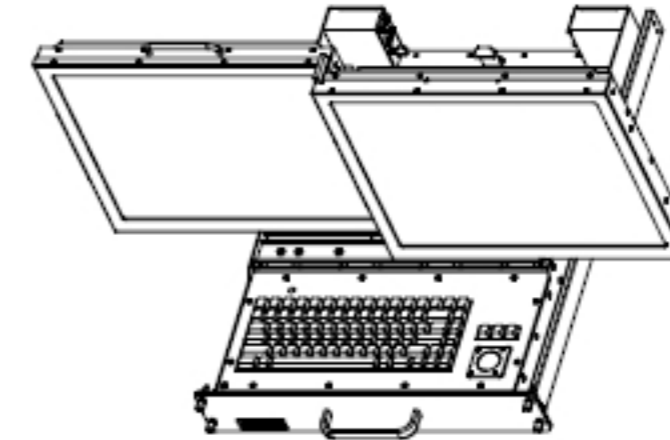


CLOSED/STOWED POSITION

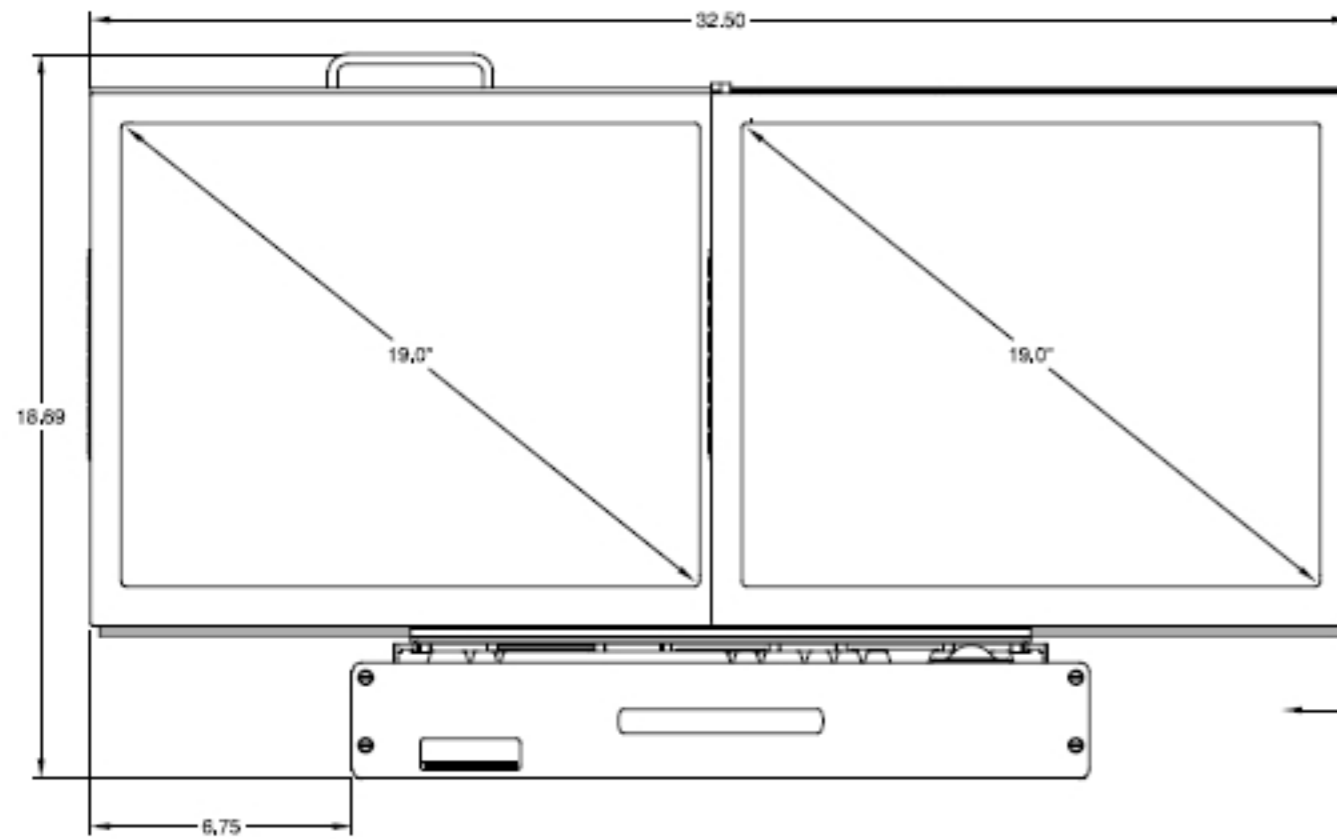


OPEN/DEPLOYED POSITION

MOUNTING HARDWARE
10-32 x 1.13" LONG 4X

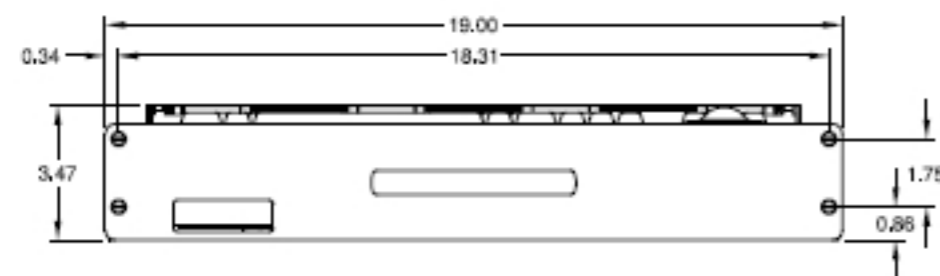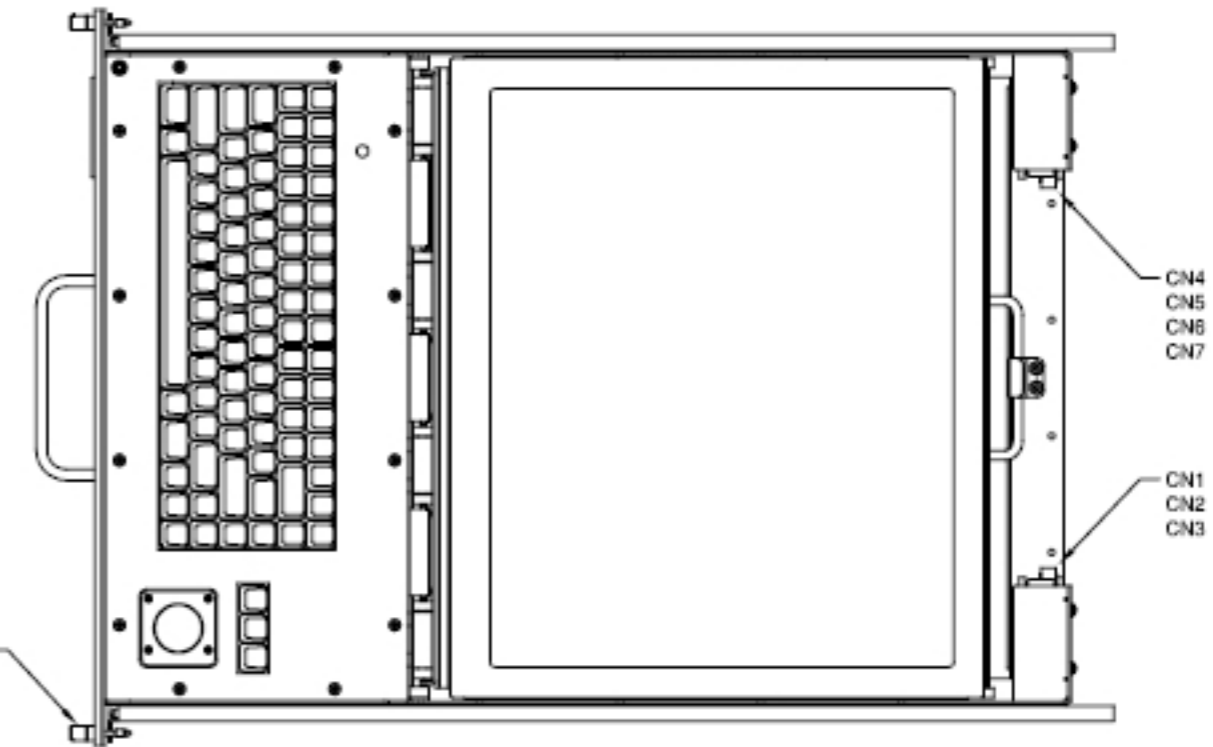

CLOSED/STOWED POSITION

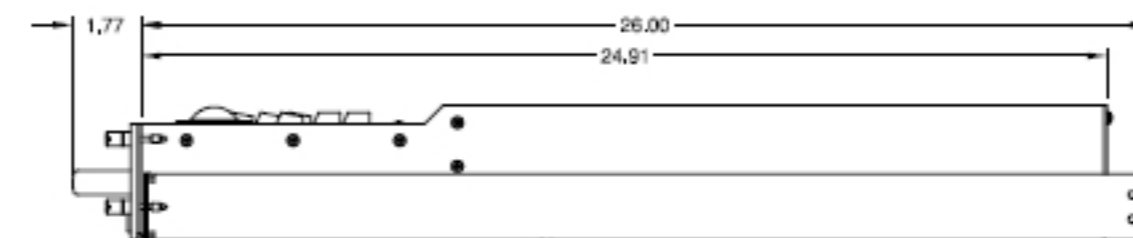

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
±1/32 .X ±.031 ±0° 30'
.XX ±.020

CONNECTOR CHART			MECHANICAL OUTLINE ONLY, SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. U.O.S. ALL DIMENSIONS ARE IN INCHES.	
DESIGNATION	FUNCTION	TYPE	APPROVALS	DATE
CN1	+12 VDC INPUT	DE-2W2-P	DRAWN C.P.	15-May-06
CN2, CN5	ANALOG VIDEO INPUT	DE-15-S		
CN3, CN6	COMPOSITE VIDEO INPUT	BNC STYLE	CHECKED T.R.	15-May-06
CN4	SERIAL INPUT	DE-9-S	APPROVED B.G.	15-May-06
CN7	AUDIO INPUT (OPTIONAL)	3.5mm STEREO	DO NOT SCALE DRAWING	



301 Oxford Valley Road, Suite 1502, Yardley, PA 19067
Tel 215-321-9100 Fax 215-321-9190
www.microdisc.com

MD-2UDS19-SxS
19.0" SXGA FLAT PANEL MONITOR

B	CAGE CODE	DWG. NO.	REV
	OLLY4		-